


Product data sheet

Regenerative turbine pump

Bracket pump with magnetic coupling

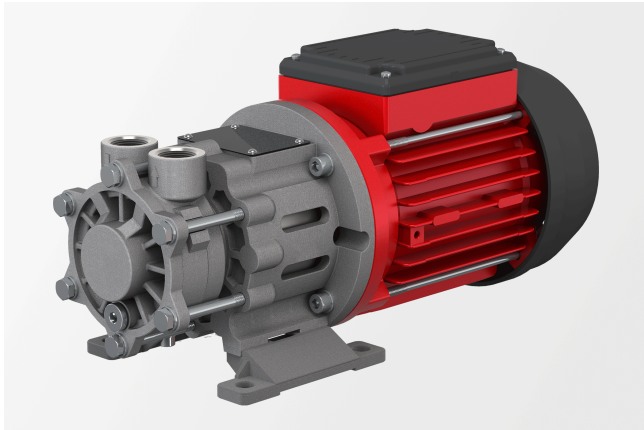

Description

- » Regenerative turbine pump
- » Bracket pump
- » Magnetic coupling
- » Hermetically sealed
- » Suitable for the delivery of gas shares
- » Steep characteristic curve

Markets and applications

Industrial cooling

- » Chillers/cooling machines
- » Cooling appliances
- » Semiconductor manufacturing
- » Industrial processes up to -100°C

Plastics processing

- » Tool tempering for injection moulding

Road and rail

- » Cooling of electrical and mechanical vehicle components, e.g. traction coolers, gearboxes and batteries

Temperature control

- » Laboratory tempering devices
- » Hot-water tempering devices
- » Oil tempering devices
- » Roller tempering
- » Tool tempering for aluminium injection moulding
- » Tool tempering for plastic injection moulding
- » Semiconductor manufacturing

Get in touch with us!


Speck Pumpen Systemtechnik GmbH
 Regensburger Ring 6-8
 91154 Roth
 Deutschland

Make a non-binding enquiry

info@speck.de

Technical data

International system of units, alternating current 50 Hz

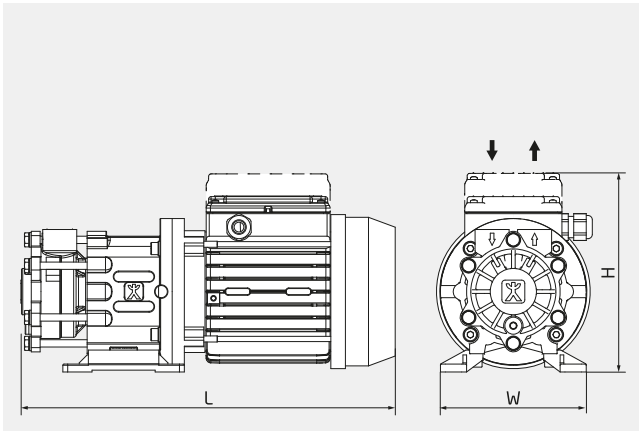


H 144-163 mm

W 130 mm

L 341 mm

Dimensions may vary depending on the design.

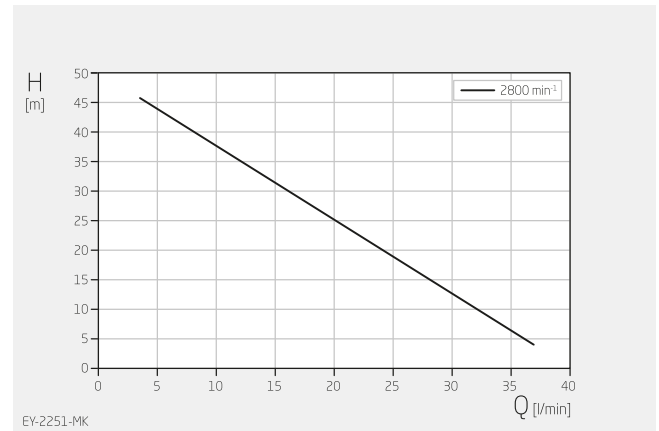


Specifications apply for water at 20°C and nominal speed.

Product type	Regenerative turbine pump
Shaft sealing/coupling	None/magnetic coupling
Pump design	Bracket pump
Typical media	Water max. +140 °C Oil max. +140 °C
Self-priming	No
Variable speed	Frequency-converter-compatible motor on request
Total head	5-46 m
Flow rate	4-38 l/min
Nominal pressure	PN 16
Motor current type	3~
Type of motor	Asynchronous motor
Nominal motor power	0.50 – 0.55 kW
Nominal motor speed	2800 rpm
Suction-side connection design	Thread: G, NPT, Rc/PT
Suction-side connection size	G ½"
Pressure-side connection design	Thread: G, NPT, Rc/PT
Pressure-side connection size	G ½"
Material designs	Stainless steel
Explosion protection	None

Technical data

International system of units, alternating current 60 Hz

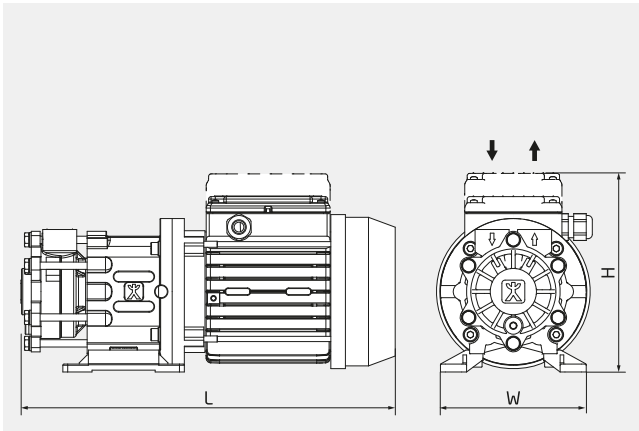


H 144-163 mm

W 130 mm

L 341 mm

Dimensions may vary depending on the design.

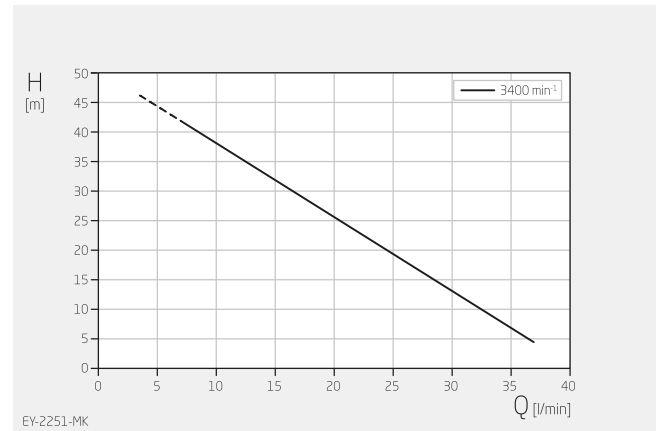


Specifications apply for water at 20°C and nominal speed.

Product type	Regenerative turbine pump
Shaft sealing/coupling	None/magnetic coupling
Pump design	Bracket pump
Typical media	Water max. +140 °C Oil max. +140 °C
Self-priming	No
Variable speed	Frequency-converter-compatible motor on request
Total head	5-42 m
Flow rate	4-38 l/min
Nominal pressure	PN 16
Motor current type	3~
Type of motor	Asynchronous motor
Nominal motor power	0.50 - 0.55 kW
Nominal motor speed	3400 rpm
Suction-side connection design	Thread: G, NPT, Rc/PT
Suction-side connection size	G 1/2"
Pressure-side connection design	Thread: G, NPT, Rc/PT
Pressure-side connection size	G 1/2"
Material designs	Stainless steel
Explosion protection	None

Technical data

Anglo-American system of measurement, alternating current 60 Hz

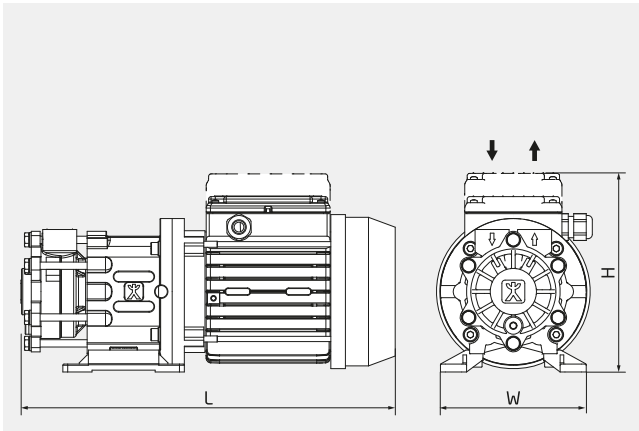


H 5,67-6,42 inch

W 5,12 inch


L 13,43 inch

Dimensions may vary depending on the design.

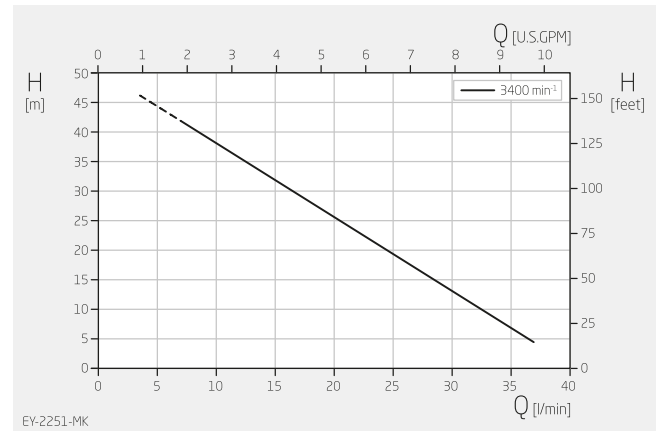

EY-2251-MK

Specifications apply for water at 68°F and nominal speed.

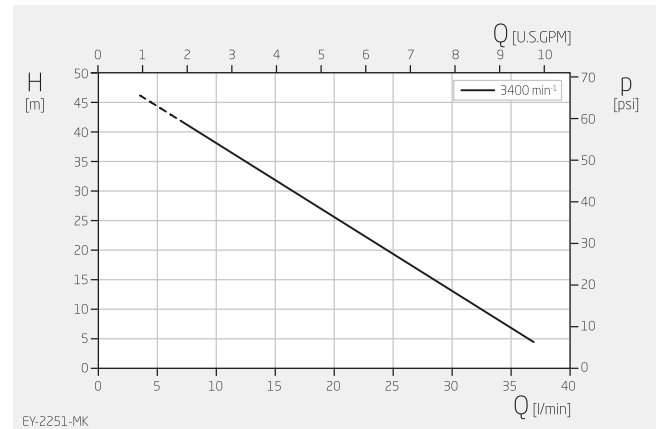

EY-2251-MK

Specifications apply for water at 68°F and nominal speed.

Product type Regenerative turbine pump

Shaft sealing/coupling None/magnetic coupling

Pump design Bracket pump

Typical media Water max. +284 °F
Oil max. +284 °F

Self-priming No

Variable speed Frequency-converter-compatible motor on request

Total head 16-138 ft

Flow rate 1.1-10.0 USGPM

Nominal pressure PN 16

Motor current type 3~

Type of motor Asynchronous motor

Nominal motor power 0.67 - 0.73 HP

Nominal motor speed 3400 rpm

Suction-side connection design Thread: G, NPT, Rc/PT

Suction-side connection size G ½"

Pressure-side connection design Thread: G, NPT, Rc/PT

Pressure-side connection size G ½"

Material designs Stainless steel

Explosion protection None