

Product data sheet

Vacuum unit

Speed-controlled vacuum unit with bi-functional vacuum water pump and built-in separator



Description

- » Vacuum unit with bi-functional vacuum water pump
- » Speed-controlled
- » Built-in, stainless steel separator
- » Designed for suction of air-water mixes
- » Compact design
- » On-demand vacuum generation for high efficiency
- » Easy to install in the place of existing vacuum pumps
- » Decentralised system, intelligent control system, easy to operate

Markets and applications

Plastics processing

- » Wet and dry calibration of plastic profiles
- » Extruder compounding

Get in touch with us!


Speck Pumpen Vakuumtechnik GmbH
Regensburger Ring 6-8
91154 Roth
Deutschland

Make a non-binding enquiry

info@speck.de

Technical data

International system of units, alternating current

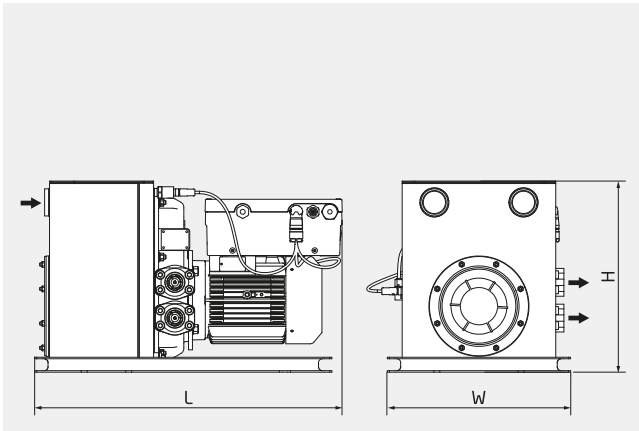


H	385 mm
W	370 mm
L	620-687 mm

Dimensions may vary depending on the design.

Product type	BluSystems vacuum unit
Shaft sealing	Mechanical seal and packing ring
Pump design	Bi-functional close-coupled pump (liquid ring vacuum pump/water pump) with built-in separator
Typical media	Gas/water mixtures
Variable speed	Yes
Max. rel. negative pressure	-930 mbar
Max. suction capacity – gas	105 m ³ /h
Min. suction capacity – water	6 m ³ /h
Motor current type	3~
Type of motor	Asynchronous motor
Nominal motor power	2.8 – 4.3 kW
Motor frequency	7 – 67 Hz
Suction-side connection design	Threaded
Suction-side connection size	G 1½"
Pressure-side connection design	SAE
Pressure-side connection size	SAE 1¼"
Material designs	Grey cast iron Non-ferrous metal
Explosion protection	None

Technical data

Anglo-American system of measurement, alternating current

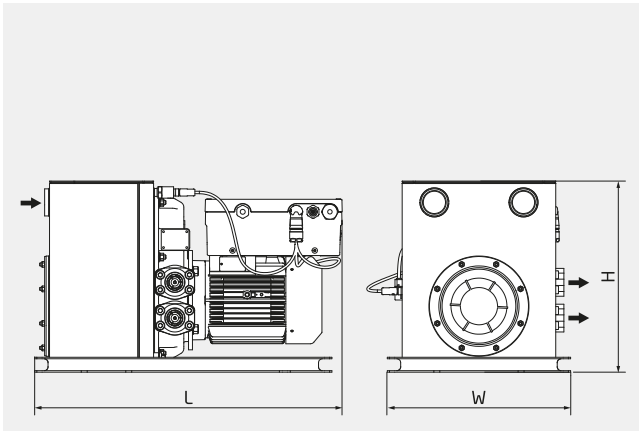

H	15,16 inch
W	14,57 inch
L	24,41-27,05 inch

Dimensions may vary depending on the design.

Product type	BluSystems vacuum unit
Shaft sealing	Mechanical seal and packing ring
Pump design	Bi-functional close-coupled pump (liquid ring vacuum pump/water pump) with built-in separator
Typical media	Gas/water mixtures
Variable speed	Yes
Max. rel. negative pressure	-27.5 inHg
Max. suction capacity – gas	61.8 CFM
Min. suction capacity – water	3.5 CFM
Motor current type	3~
Type of motor	Asynchronous motor
Nominal motor power	8.8 – 5.8 HP
Motor frequency	7 – 67 Hz
Suction-side connection design	Threaded
Suction-side connection size	G 1½"
Pressure-side connection design	SAE
Pressure-side connection size	SAE 1¼"
Material designs	Grey cast iron Non-ferrous metal
Explosion protection	None